


LED T8 Tubes CL

Magnolux LED T8 Tubes are compatible with both, magnetic and electronic ballasts, and are the most efficient and environmentally friendly alternative to traditional fluorescent tubes.

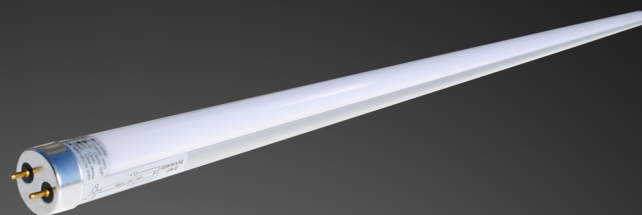

LED T8 Tube CL - M30-1500

HIGHLIGHTS

- » high energy efficiency
- » lifetime up to 25.000 hours
- » EM and CEM-models are compatibel with magnetic and electric ballast

APPLICATION AREA

Offices, Hotels, Supermarkets, Warehouses, Commercial and Industrial Buildings, Airports, Schools, Hospitals, Parking Decks, etc.

SPECIFICATIONS

| | |
|-------------------------|---|
| Artikel Number | 101414 |
| Product Name | LED T8 Tube CL |
| Model | M30-1500 |
| Socket | G13 - 26 mm |
| Lumen Output | 2850 Lumen |
| Power Consumption | 30 Watt |
| Input Voltage/Hertz | 85-265 V / 50-60 Hz |
| Power Factor | >0,95 |
| Light Color | 4000 Kelvin |
| Color Rendering Index | >80 |
| LED Type | SMD |
| Beam Angle | 120° |
| Lifetime | 25000 h |
| Environment Temperature | -10°C / +40°C |
| Material | Alu silver/PC milky |
| Product Dimensions | Ø 26 mm, L 1500 mm |
| Certificates | CE, RoHs, EN62471 |
| PCS/Package | 25 |
| Packaging Size | 1540 x 215 x 220 mm |
| Weight/Packaging | 22000 g |
| Product Info | compatible with magnetic ballast, use max. 2 tubes on one ballast |

